



# Get started with your SmartRock™ or SmartRock™ Plus sensors in these easy steps



**1** Remove the temperature probe from the sensor to activate

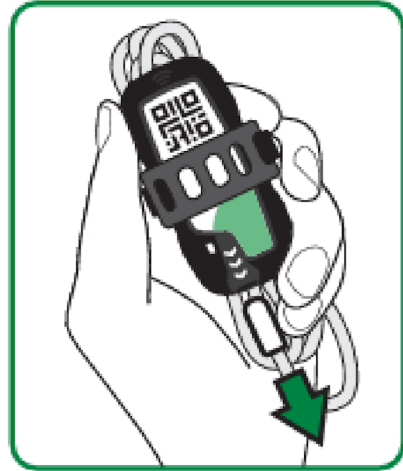


**2** Add the sensor to your project by scanning the QR Code

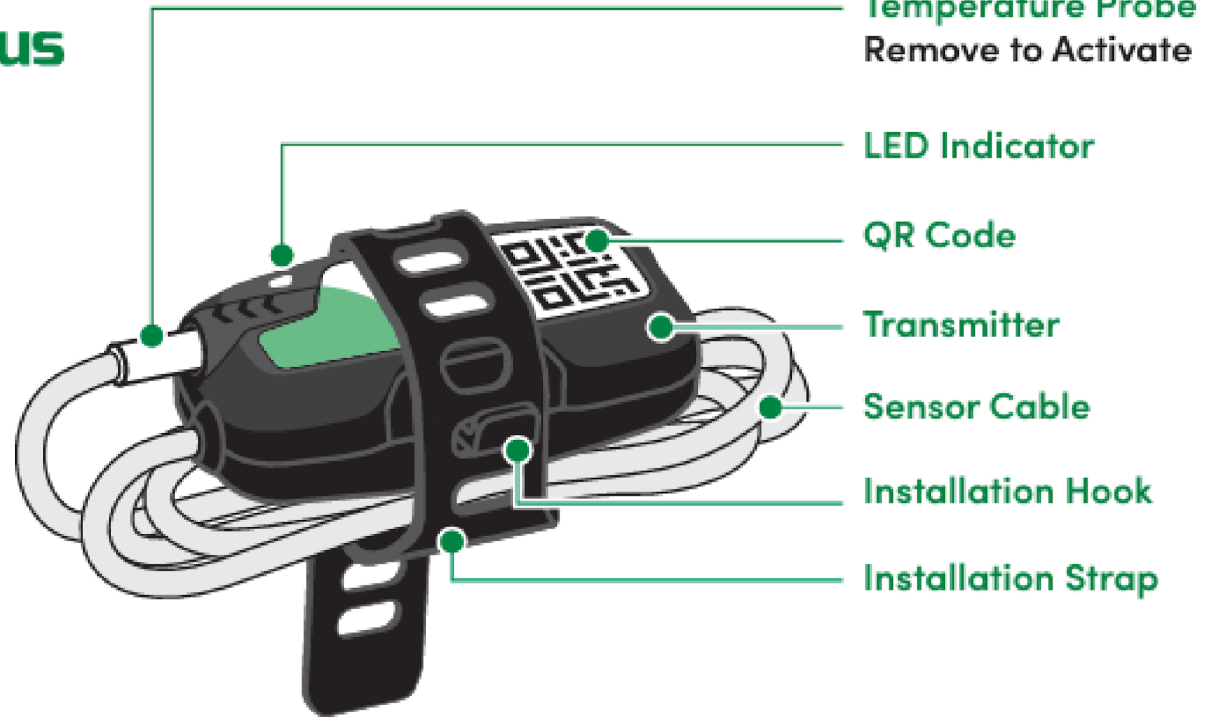


**3** Assign the sensor a name in the mobile app and on it's label



**4** Install the transmitter on rebar no more than 2 inches (5cm) from concrete surface

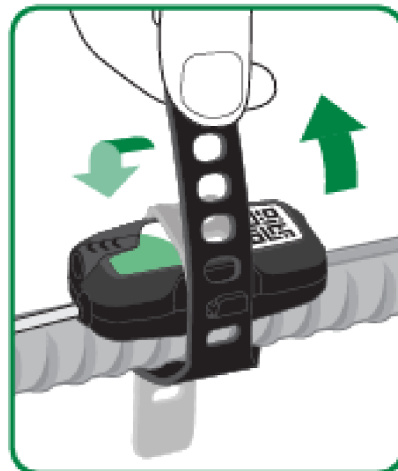

**5** Pull strap tight over the installation hook and fold remaining strap over

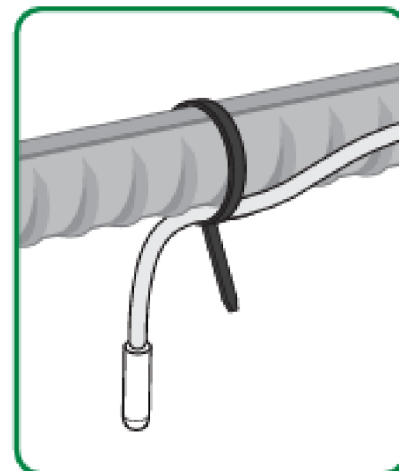

**6** Secure the cable and temperature probe below the rebar



**7** Pour concrete and monitor results in the mobile app or remotely with SmartHub™